

1 Port Inline Mini Fiber Terminal Box

with SC/APC (Shorter)

- For FTTx Solution



Product Description

Ability to carry out the termination of compact optical cables through connectorization in the field. Anchoring cables with versatile retention system that allows compatibility with drop cables.

Keyed Characteristics

- ✓ Compact dimensional; Easy handling;
- ✓ Fixing to the wall by screw or double-sided tape;
- ✓ Can be installed on any flat vertical surface; Symmetrical cover that allows fitting on both sides;
- ✓ Compatibility with:
- ✓ Fit to cable 2x1.6mm, 3x2mm and circular 3mm drop cables; 0.9mm diameter fiber for

Invisilight applications.

Maximum input: Maximum diameter of the input cable (mm) is 3.0mm

Maximum output: Output cable diameter (mm) is 3.0mm

Adapter: SC/APC Adapter

* Simplex without shutter

* Simplex with shutter

Material: PC+ABS

IP Rate: IP30

IK Rate: IK09

Technical Parameter


Type	Fiber Optic Adapter
Material	ABS
Optical Fiber Diameter	125 μ m (657A& 657B)
Tight buffer Diameter (μ m)	250 μ m
Fiber Mode	Singlemode
Operation Time	About 30s (No fiber cut)
Average Insertion Loss (dB)	s 0.15dB(1310nm & 1550nm)
Application	FTTx networks (FTTH, FTTD)
Operating Temperature	-25~+75°C
Outline Dimension	94x25x19mm
RoHS, CE	Yes
IP Rate	IP30

Aplicattion

- ✓ FTTx networks (FTTH, FTTD)
- ✓ Enterprise/Access networks



Products Scheme

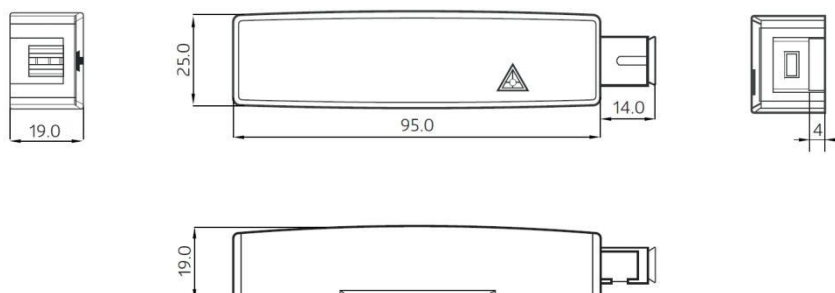

Cable Performance

Cabo Micro Indoor Low Friction - 2mm x 1,6mm;

Cabo Drop Low Friction - 3mm x 2mm;

Cabo Drop Fast Compacto - 3mm x 2mm; Cabo Drop

Circular 3mm

